


DIA-COME DC175/DC179 LEVER

● Please read this instruction sheet carefully when installing the Levers


※Description

- DC175 Lever is a brake Lever allowing Left side and Right side use
- DC179 have different Right or Left side Lever
- Same clamp for $\Phi 22.2\text{mm} \sim \Phi 23.8\text{mm}$
- Turning the washer 160315 opposite could adjust the Lever reach

DC175Lever

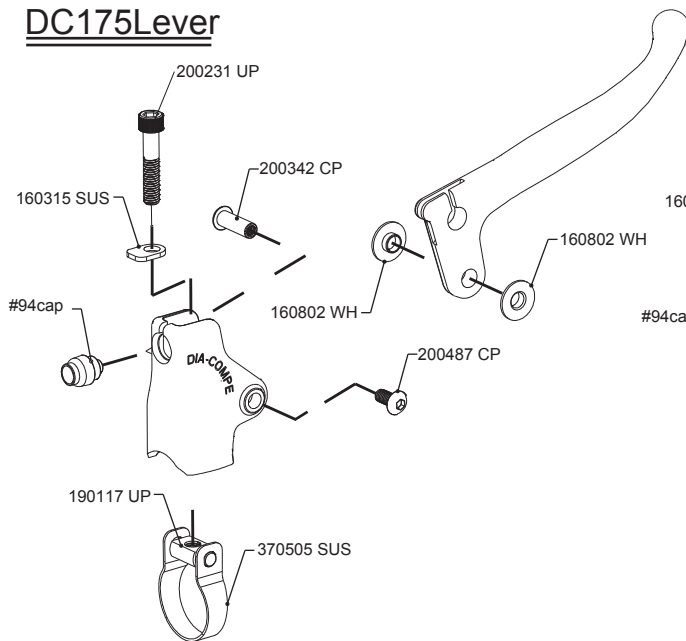


DC179Lever

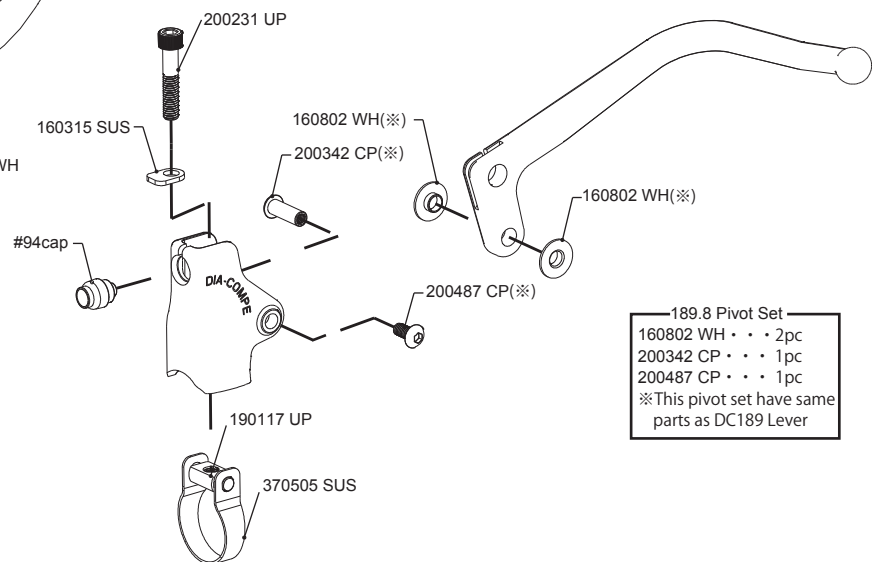



189.8 Pivot Set
 160802 WH . . . 2pc
 200342 CP . . . 1pc
 200487 CP . . . 1pc
 ※ This pivot set have same parts as DC189 Lever

※Installation of the brake Lever

1. Install the brake Lever into the handle bar and use 4mm Hex key wrench to tighten the fixing bolt. Tighten torque: $6-8\text{N.m}$ ($60-80\text{kgf.cm}$)
2. Install the wire, first assembly outer casing with 94A cap then insert the outer casing head into the Lever and then insert the 94A into the Bracket
3. For Handle bar $\Phi 22.2\text{mm} \sim \Phi 23.8\text{mm}$ use

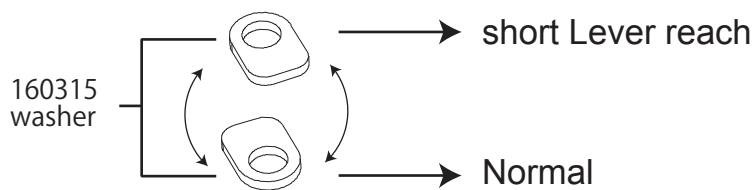

※ 1

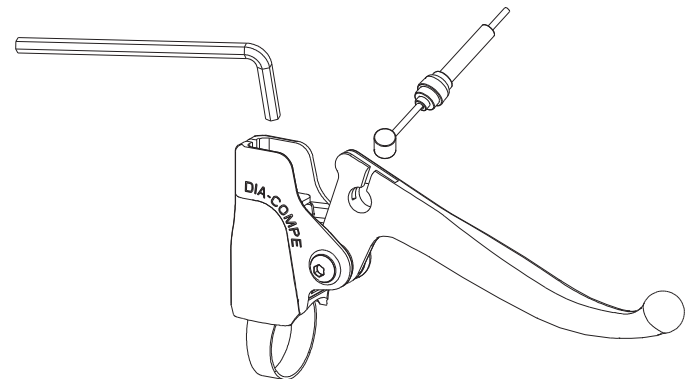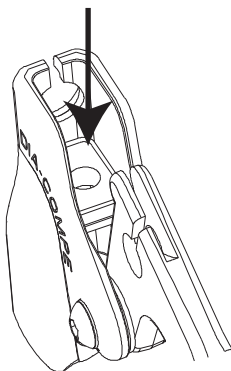

DIA-COMPE, TAIWAN CO., LTD.
 NO. 62, 35TH RD., TAICHUNG INDUSTRIAL PARK,
 TAICHUNG, TAIWAN, R.O.C.
 TEL: 886-4-2359-1117 FAX: 886-4-2359-3188
 www.diacompe.com.tw
 July.2020