

CARTRIDGE TYPE BRAKE PADS SERVICE INSTRUCTION

-GC450 PAD,CR-X-PAD,RC-PAD,ARC-PAD-

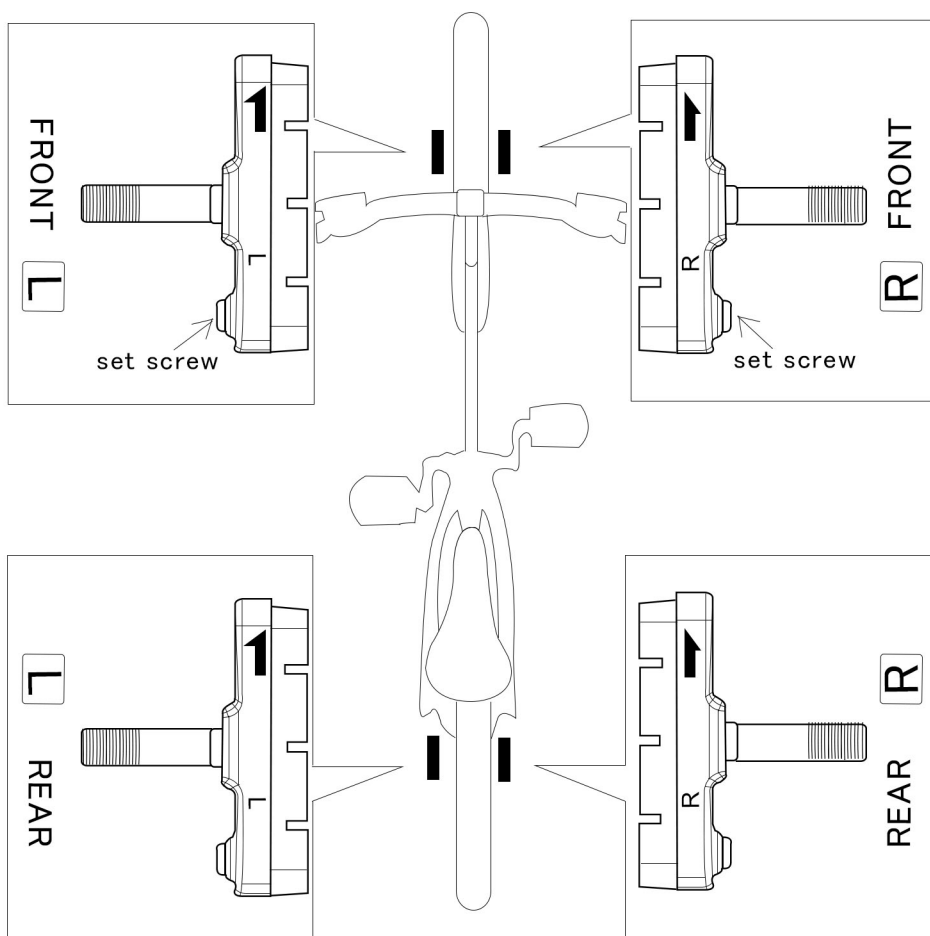


Fig.A

- All Brake pads should be aligned with the direction sign (arrow mark) on the cartridge.
- Be sure to set the Brake pad insertion port faces backwards.
- Tighten the set screw. tightening torque: $1 \sim 1.5\text{Nm}$ ($10 \sim 15\text{kgf} / \text{cm}$)

DIA-COMPE, TAIWAN CO., LTD

diatech@ms15.hinet.net

www.diacompe.com.tw

Aug.2024